

AccessPoint Hardware Guide

March 2014



Contents

1	Maintenance	3
2	AccessPoint Electrical Specifications.....	3
3	AccessPoint Connections	3
3.1	AccessPoint with Connector on PUK.....	3
3.1.1	Start-up Button Connection	3
3.1.2	E-Stop Connection.....	3
3.1.3	On Indicator LED or Heartbeat.....	4
3.1.4	Interface Boards	4
4	AccessPoint Mounting Details	4
5	AccessPoint Communications	5
5.1	AccessPoint Communication Specifications	5
5.2	Communication Protocol	5
6	Configuring the AccessPoint	7
7	AccessPoint Magic Cards.....	8
7.1	Test Connections Card	8
7.2	Set Factory Defaults Card.....	8
7.3	Set Basic Mode Card	8
7.4	Set Enterprise Mode Card.....	9
8	AccessPoint Operation	9
9	AccessPoint Interface Boards.....	11
9.1	Crane Pendant Board	11
9.1.1	Electrical Specifications.....	11
9.1.2	Connections	11
9.2	Vehicle Board	12
9.2.1	Electrical specifications	12
9.2.2	Connections	12

1 Maintenance

Check the unit for mechanical damage and cracks periodically. Replace if damaged.

When the AccessPoint is used in conjunction with a Liftlog logger, it is recommended that the logger unit be inspected annually, logged data is downloaded and saved to disk, the battery voltage is checked and the battery is replaced, if necessary. These tasks are accomplished using the Pocket FSU application running on a PDA.


2 AccessPoint Electrical Specifications

Parameter	Description	Min	Typ	Max	Units
V_{in}	Supply voltage	4		8	VAC
I_{in}	Supply current	6	7	90*	mA
Start up Button Output	Current		10		mA

*only when communicating via Bluetooth

3 AccessPoint Connections

3.1 AccessPoint with Connector on PUK

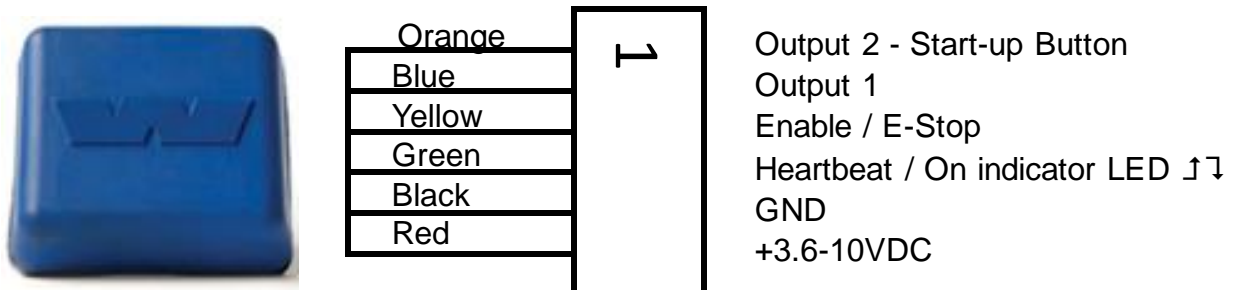

3.1.1 Start-up Button Connection

The Start-up button connection is used as a signal to provide a pulsed output to start the equipment. The start-up connection pulls low at up to 10mA


3.1.2 E-Stop Connection

The E-Stop connection is an E-Stop monitor. It is simply a voltage input to show the state of the E-Stop. The signal level may be swapped by using the Pocket Field Support Unit.

3.1.3 On Indicator LED or Heartbeat

If the equipment the AccessPoint is to be installed on has a light or LED that indicates the equipment is functioning (for example, a flashing green LED), the AccessPoint heartbeat connection is connected to the terminal that changes level.

4 AccessPoint Mounting Details

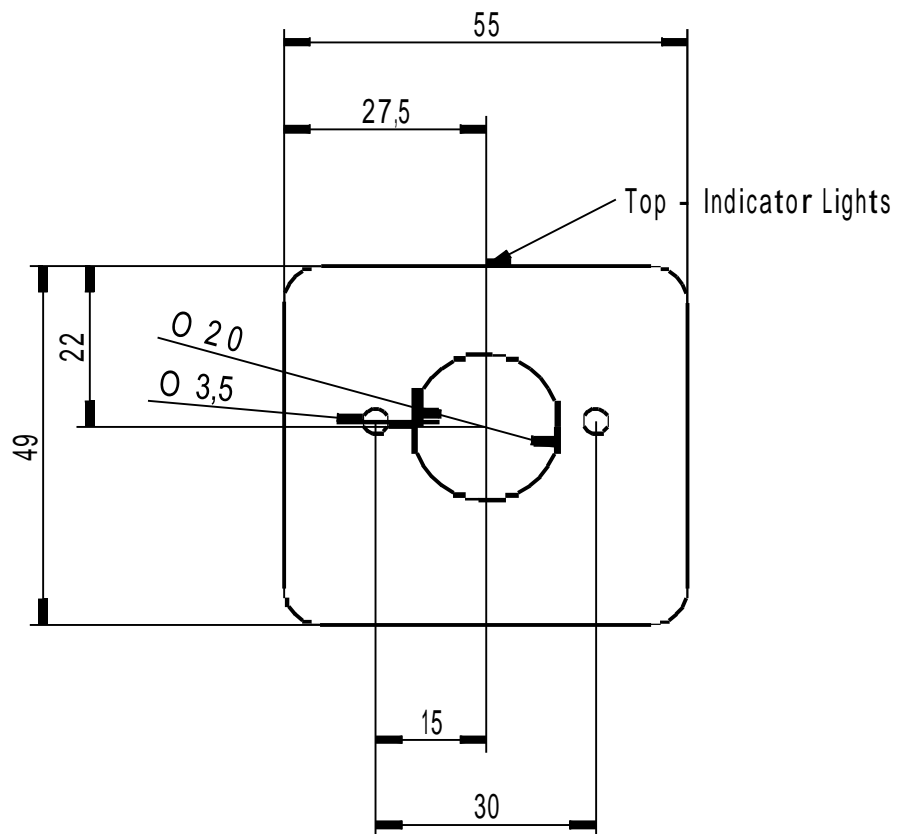

5 AccessPoint Communications

5.1 AccessPoint Communication Specifications

Communications between the device and a host is via a Bluetooth radio link. The Bluetooth device PIN is **0000**.

5.2 Communication Protocol

The host sends single character commands to the device to write or query parameters. Each command must be followed by a carriage return <CR>(ASCII 13).

Where the command is a query command, no arguments are sent and the device will respond with a single line (except for the “?” command) the requested value in ASCII text followed by a <CR>.

Where the command is a set command, an argument may be included between the command and the <CR>. Where numbers are sent or received, they are sent as clear text; e.g. “1234”

Communication with the AccessPoint using text commands is best performed while the AccessPoint is connected to a Liftlog logger; otherwise the AccessPoint communication is only active for a short time within a 30 second period.

<i>Command</i>	<i>R/W</i>	<i>Description</i>	<i>Example</i>
a	Read	AccessPoint mode	Send:a<CR> Rcv:2
A	Write	Write AccessPoint mode	Send:A2<CR>
b	Read	Read button timeout	Send:b<CR> Rcv:40
B	Write	Write button timeout	Send:A40<CR>
d	Read	Get debug level	Send:d<CR> Rcv:0
D	Write	Write debug level	Send:A0<CR>
C	Write	E Stop Edge detect mode	Send:C0<CR>EStop when estop input is asserted Send:C1<CR>EStop when estop input changes from not asserted to asserted
C	Read	E Stop Edge detect mode	Send:j<CR> Rcv:0
E	Read	Read E-Stop mode	Send:e<CR> Rcv:0
E	Write	Write E-Stop mode	Send:E0<CR> Normal E-Stop Send:E1<CR> Inverted E-Stop mode
F	Write	Mifare starting block	Send:F20<CR>
f	Read	Mifare starting block	Send:f<CR>

<i>Command</i>	<i>R/W</i>	<i>Description</i>	<i>Example</i>
			Rcv:20
G	Write	Log unauthorized cards	Send:G1<CR> log unauthorized cards Send:G0<CR> don't log them
G	Read	Log unauthorized cards	Send:g<CR> Rcv:0
H	Read	Read hardware version	Send:h<CR> Rcv:2
I	Read	Read equipment id	Send:i<CR> Rcv:hoist1
J	Write	Start Mode	Send:J0<CR> push the start button once Send:J1<CR> push the start button twice
J	Read	Start Mode	Send:j<CR> Rcv:0
I	Write	Write equipment id	Send:lhoist1<CR>
L	Read	Read logger Bluetooth id	Send:l Rcv:00:07:80:86:19:47
L	Write	Set logger Bluetooth id	Send:L00:07:80:86:19:47<CR>
M	Read	Read motion threshold	Send:m<CR> Rcv:20
M	Write	Write motion threshold	Send:M20<CR>
N	Read	Read pendant mode	Send:n<CR> Rcv:
N	Write	Write pendant mode	Send:N1<CR> Set to pendant mode Send:N0<CR> Set normal mode
O	Read	Read motion settle time	Send:o<CR> Rcv:10
O	Write	Write motion settle time	Send:O10<CR>
P	Read	Read putdown timeout	Send:p<CR> Rcv:125
P	Write	Write putdown timeout	Send:P0<CR> put down timeout disabled. Send:P255<CR> Put down timeout 25.5seconds
Q	Read	Read equipment class	Send:q Rcv:crane
Q	Write	Write equipment class	Send:Qcrane<CR>
R	Read	Read RFID scan timeout	Send:r<CR> Rcv:85
R	Write	Write RFID scan timeout	Send:R85<CR>
s	Read	Read site id	Send:s<CR>

<i>Command</i>	<i>R/W</i>	<i>Description</i>	<i>Example</i>
			Rcv:workshop
S	Write	Write site id	Send:Sworkshop<CR>
T	Read	Read motion timeout	Send:t<CR> Rcv:20
T	Write	Write motion timeout	Send:T20<CR>
U	Read	Read local log	Send:u0<CR> Rcv:last_user_name Send:u5<CR> Rcv:sixth_user_on_log
V	Read	Read firmware version number	Send:v<CR> Rcv:1.3
W	Write	Mifare End Block	Send:W160<CR>
W	Read	Mifare End Block	Send:w<CR> Rcv:160
X	Read	Read Door mode	Send:x<CR> Rcv:0
X	Write	Write Door mode	Send:X0<CR> Door mode disabled Send:X1<CR> Door mode enabled
Y	Read	Read time	Send:y<CR> Rcv:30/05/10 07:20
Y	Write	Write time	Send:Y30/05/10 07:20<CR>
Z	Read	Read local log size	Send:z<CR> Rcv:6
?	Read	Read all parameters	Send:?<CR>
*		Reset	Send:*<CR>
!		QA mode	Send:!!<CR>
.	Read	Read state of AccessPoint	Send:.<CR> Rcv:E_STOPPED
@	Read	Running Minutes	Send:@<CR> Rcv:34982

6 Configuring the AccessPoint

There are two ways to configure the AccessPoint:

- a) Using a PDA running the Pocket FSU (Field Service Utility)
- b) Using the Setup Magic Card.

Option (a) is always available and provides access to advanced settings and configurations

Option (b) is only available when the AccessPoint is to be used with a Liftlog device (see section “AccessPoint Magic Cards” for more information on configuring using Magic Cards).

7 AccessPoint Magic Cards

A feature of the AccessPoint is that it can use special cards to simplify some operations.

7.1 Test Connections Card

This card is used to check the connection and operation of the inputs to the AccessPoint.

Simply swipe the “Test Connections” card. The AccessPoint will rapidly flash the green light, signifying it has read a magic card. The AccessPoint will then respond to the input connections changing state as follows:

- ☐ The red light will glow when E-stop / Enable is active.
- ☐ The green light will replicate the equipment heartbeat indicator.

To exit the test connections mode, remove power to the AccessPoint (i.e. disconnect battery or power down equipment).

7.2 Set Factory Defaults Card

The “Set Factory Defaults” card will reset the AccessPoint to factory settings. Restoring factory settings may be required when replacing a bound Liftlog unit or if you are having difficulty connecting to the AccessPoint with the PocketFSU application.

WARNING: Resetting to factory defaults may erase the EquipmentID/Site/Class settings of the AccessPoint. Be sure to record these before using this card.

To use the “Set Factory Defaults” card, power up the AccessPoint and pull the E-Stop out. If the AccessPoint has not been previously setup, the red light will flash slowly, indicating that the unit is ready. Otherwise, wait for the green flashing to stop. Swipe the “Set Factory Defaults” card. The AccessPoint will rapidly flash the green light, signifying it has read a magic card. The AccessPoint will now be programmed with the factory default settings.

7.3 Set Basic Mode Card

The “Set Basic” mode card will set the AccessPoint to operate in the Basic access control mode. When in this mode, the AccessPoint will allow operation of the equipment when it reads any RFID card of the same type as the AccessPoint cards. This mode of operation requires no AccessPoint Manager license or administration.

Swipe the “Set Basic” card. The AccessPoint will rapidly flash the green light, signifying it has read a magic card. The AccessPoint is now in Basic Mode.

7.4 Set Enterprise Mode Card

The “Set Enterprise” mode card will set the AccessPoint to operate in the default mode, allowing access to individual pieces of equipment, classes of equipment, or sites to be controlled on a per user basis using the AccessPoint Manager software

Swipe the “Set Enterprise” card. The AccessPoint will rapidly flash the green light, signifying it has read a magic card. The AccessPoint is now in Enterprise Mode.



















8 AccessPoint Operation




The AccessPoint is used by placing specially configured AccessPoint cards over the card swipe target (“swiping”). The current state of the AccessPoint is indicated by two lights flashing in different ways. For more information on configuring AccessPoint cards using the AccessPoint Manager application, download the latest version of the AccessPoint Manager User Guide from <http://www.whitingpassport.com/products/access-point.html#tab-4>




To use the AccessPoint follow the steps below.

- 1) With the E-stop button pressed.
- 2) Ensure the equipment is powered up.
 - a. If the AccessPoint power is reconnected, both lights will flash briefly and then the green light will flash for several seconds while it searches for a Liftlog logger.
 - b. If the green light flashes followed by the red light flashing slowly, the AccessPoint could not find a logger. The AccessPoint will continue to flash the green light, followed by slowly flashing the red light at regular intervals (about 30 seconds).
 - c. When the green light stops flashing with no slow red flashing, initial communication is complete.
- 3) Release the E-Stop button. AccessPoint will flash the red and green lights alternately.
- 4) Swipe a user card by moving card across target. AccessPoint will turn the green light on for an authorized card read or turn on the red light for an unauthorized card read.
- 5) With an authorized card read, the equipment will be enabled by the AccessPoint. The equipment will beep (if a beeper is fitted) and the AccessPoint’s green light will flash slowly to indicate that the equipment is operable.
- 6) If the E-Stop button is pressed, the user will be logged off and the equipment made inoperable. The user will also be logged out if the equipment has an inactivity timeout or is stationary (put down function enabled).
- 7) When the AccessPoint is logging out, the red light will flash rapidly for several seconds. After being logged out, the AccessPoint must once again be swiped to enable the equipment

Indicator light states for AccessPoint operation

State	LED signals		Flash Rate	Notes
	Green	Red		
Power up			Quick single flash red and green together	Short flash on power up to indicate AccessPoint is on
Looking for Liftlog after power on			Medium rate	
Cannot find Liftlog			Slow	Check Liftlog for powered up state
Idle – logged off				
Ready to swipe card			Alternating flashing	
Logged on			Slow	
Card Accepted			Light on 2 seconds	
Card rejected				See AccessPoint administrator
About to be logged off and			Fast	

-  Red light on
-  Red light flashing
-  Red light off

-  Green light on
-  Green light flashing
-  Green light off

9 AccessPoint Interface Boards


9.1 Crane Pendant Board

9.1.1 Electrical Specifications

Parameter	Description	Min	Typ	Max	Units
V_{in}	Supply voltage	18		55	VAC
Relay Output 1	Current			500	mA
Relay Output 1	Voltage			60	VAC
Relay Output 1	Power			10	W
Relay Output 2	Current			500	mA
Relay Output 2	Voltage			60	VAC
Relay Output 2	Power			10	W

9.1.2 Connections

The diagram below shows the location of terminal 1, shown by the black dot on the green terminal block.

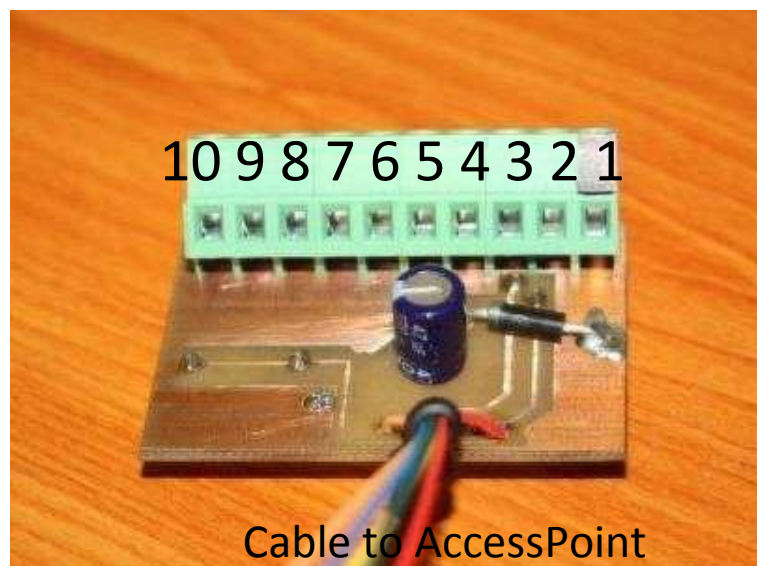

<i>Terminal Number</i>	<i>Name</i>	<i>Description</i>
1	E-Stop Monitor Switch Terminal	Connects to second NC contact on E-Stop Button
2	E-Stop Monitor Switch Terminal	
3	48VAC Input	Power
4	48VAC Input	
5	E-Stop Output	Connects in series with E-Stop switch to deactivate crane
6	E-Stop Output	
7	Start Output Terminal	Replaces start switch so AccessPoint can pulse a start signal to activate crane
8	Start Output Terminal	
9	Horn Output Terminal	Connect in parallel to the start button to sound horn when crane starts
10	Horn Output Terminal	

9.2 Vehicle Board

9.2.1 Electrical specifications


<i>Parameter</i>	<i>Description</i>	<i>Min</i>	<i>Typ</i>	<i>Max</i>	<i>Units</i>
V_{in}	Supply voltage	8		14	VDC
Relay Output (NO)	Current			10	A
Relay Output (NO)	Voltage			14	VDC
Relay Output (NC)	Current			10	A

9.2.2 Connections

The diagram below shows the location of terminal 1, shown by the white sleeve on the black cable.



Cables for connection to vehicle, cable 1

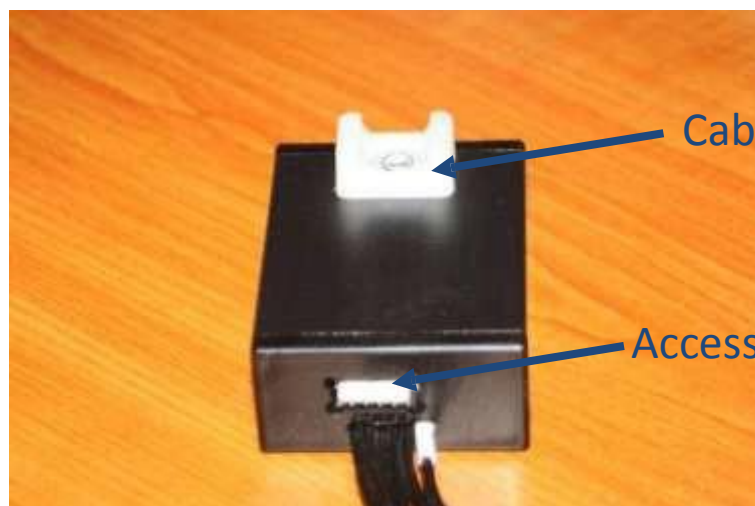

Cable tie holder

AccessPoint connector

<i>Cable Number</i>	<i>Label</i>	<i>Description</i>
1 (has white sleeve)	-	Ground connection
2	+	Power connection 8 to 14V
3	Enable	
4	N/C	Relay Output Terminal Normally Closed
5	Com	Relay Output Terminal Common
6	N/O	Relay Output Terminal Normally Open

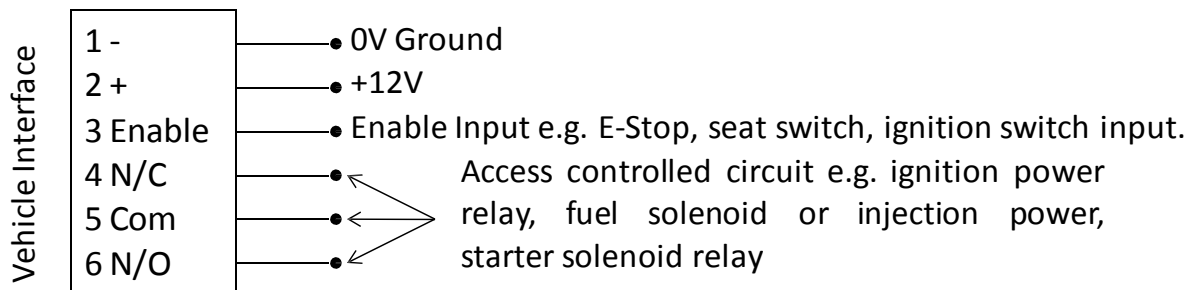


Figure 3 Example schematic of connections to Vehicle Interface Board

The enable connection is used to provide a signal to the AccessPoint to commence looking for an access card.